

SPECIFICATIONS

PRODUCTION	POWER SUPPLY	WEIGHT	HEIGHT-WIDTH-LENGTH
25 kg	½ HP 0.373 kW/h 110/220 VCA Single/Two phase 60 Hz	71.5 kg	0.95 m 0.84 m 0.86 m
50 kg	1 HP 0.746 kW/h 110/220 VCA Single/Two phase 60 Hz	95.5 kg	1.03 m 1.03 m 1.07 m
100 kg	2 HP 1.492 kW/h 220 VCA Two/Three phase 60 Hz	123.5 kg	1.23 m 1.06 m 1.14 m
200 kg	3 HP 4 kW/h 220 VCA Two/Tree phase 60 Hz		1.35 m 1.53 m 1.49 m



Main features:

- Made with angle frame, in stainless steel sheet. Half-round with or without gate, with or without fiberglass and stainless steel drum.
- 200 KG model includes safety cover, industrial reducer.


COMPONENTS:

- Tub
- Paddles
- Arrow
- Tray


Product features:

- Easy maintenance
- Saves space


25 kg

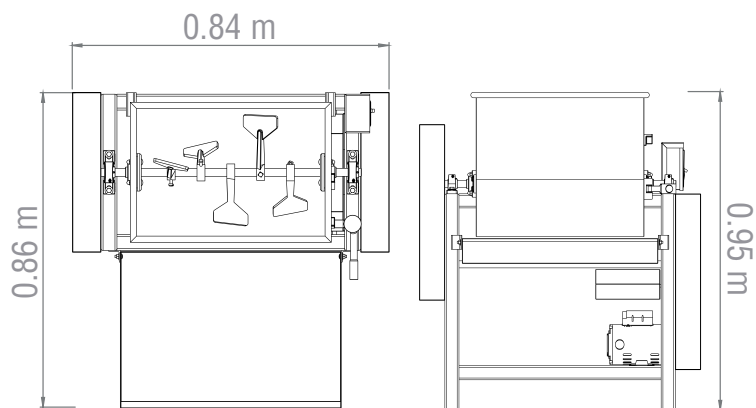

50 kg

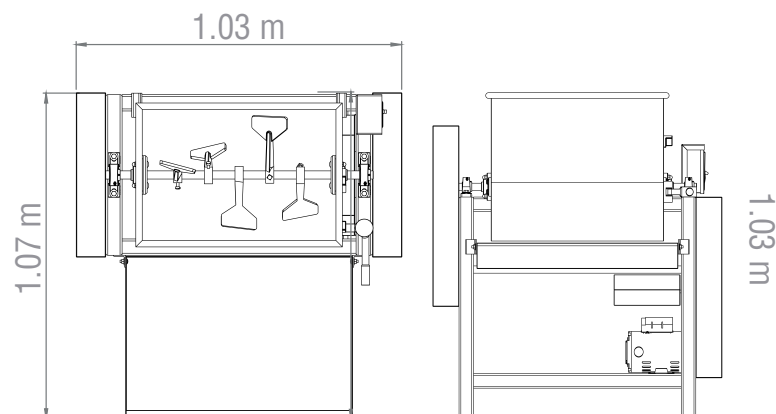

100 kg

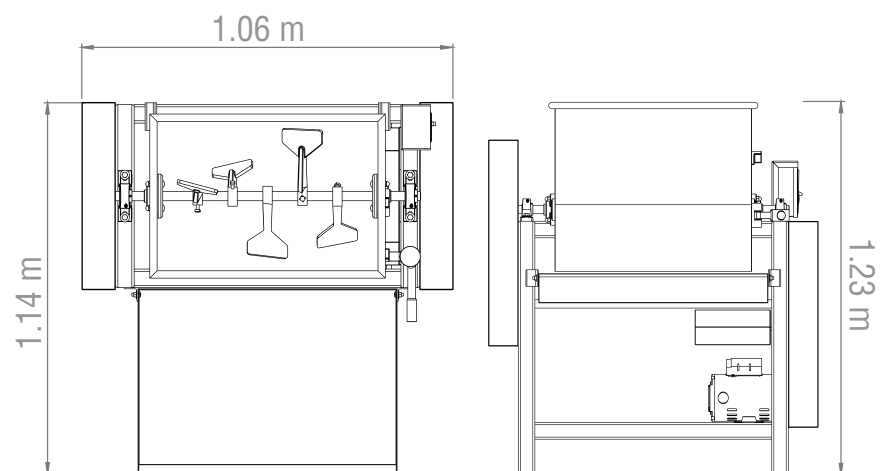

200 kg

